

PATENT SPECIFICATION

(11) 1454 597

- (21) Application No. 14065/74 (22) Filed 29 March 1974
 (31) Convention Application No. 3972/73 (32) Filed 7 May 1973 in
 (33) Austria (OE)
 (44) Complete Specification published 3 Nov. 1976
 (51) INT CL: B05B 1/14 17/06
 (52) Index at acceptance
 B2F 10E 15A2B 15AX 2G 8A 8G2E



(54) IMPROVEMENTS IN OR RELATING TO A METHOD OF
 PRILLING AND DEVICE FOR CARRYING OUT THE METHOD

(71) Wc, VEREINIGTE ÖSTERREICH-
 ISCHE EISEN — UND STAHLWERKE —
 ALPINE MONTAN AKTIENGESELL-
 SCHAFT, a company organised under the
 laws of Austria, of, Werksgelände 4010 Linz,
 Austria, do hereby declare the invention, for
 which we pray that a patent may be granted
 to us, and the method by which it is to be
 performed, to be particularly described in and
 by the following statement:—

The invention relates to a method of prilling
 liquids, in particular melts, whereby the
 liquids are divided into uniform drops.

In known prilling methods, e.g. in the pro-
 duction of prilled ammonium nitrate, the
 ammonium nitrate melt is normally sprayed
 through sprinkling nozzles into a shaft, where
 the drops solidify when falling; after cooling
 they are delivered as hard prills at the lower
 end of the shaft. The air warmed by the emit-
 ted heat is sucked off at the upper end of the
 shaft.

When the jet emerging from the nozzle
 holes disintegrates into the prill drops, because
 of the mechanics of liquids, very small drops
 are always formed in addition and these drops,
 due to their low weight, are carried away in
 the shaft by the air current and are discharged
 as dust through the fans. In commonly used
 plants this dust amounts to approximately
 0.2 per cent of the production and hardly
 counts as a production loss, but because of its
 aggressive nature, this dust can cause heavy
 damage to buildings; in addition, because of
 its high nitrogen content it may cause serious
 ecological damage.

It is known to set thread-like liquid jets
 vibrating, in order to obtain a more uniform
 distribution into drops. Thus it is known from
 the German Auslegeschrift No. 1,803,724 to
 retain a circular perforated plate elastically as
 the bottom of a container or housing and to
 set it vibrating via a laterally welded handle
 by means of a vibrator. Thereby a pressure
 wave forms above the plate, which modulates
 the plate frequency and causes periodical dis-
 turbances of the liquid which lead to the con-
 striction and subsequent disintegration of the
 jets. This known device has however the dis-

advantage that the vibration frequency has
 to be matched with the inherent frequency
 of the perforated plate and that the vibration-
 exciting force is brought in unilaterally via
 the welded handle, which results in a bending
 moment. As a result, an uneven amplitude dis-
 tribution occurs on the perforated plate and
 in places top oscillations occur, so that for
 different jets different conditions prevail, which
 lead to irregularities and to fine grain con-
 tent. Further disadvantages are that by fixing
 the plate to the container, a loss of effective-
 ness occurs and the sealing along the fixing
 is not reliable; as the contact areas between
 the perforated plate and the housing have
 to be of metal. It is also very difficult to
 clean the perforated plate.

The invention has the object of avoiding
 the above mentioned disadvantages and dif-
 ficulties; it aims at providing a method, in
 which the frequency of the vibrations acting
 upon the thread-like jets is optimally variable,
 an extremely uniform granulation of the prills
 with a narrow grain spectrum is achieved, the
 formation of fine grains is avoided and pro-
 duction losses as well as damage to buildings
 and fields is prevented.

According to the present invention, there
 is provided a method of prilling a liquid,
 in particular a melt, in which the liquid is
 passed under pressure through a perforated
 plate, wherein the liquid is subjected to
 periodical pressure fluctuations in the direc-
 tion of its flow through the perforated plate
 before it passes through the plate, and the
 frequency of these pressure fluctuations, in
 dependence upon the exit velocity v in m/sec
 and upon the perforation diameter d in mm
 substantially follows the relation

$$f = \frac{v \cdot 1000}{\pi \cdot d}$$

and is in the range of 100 to 2000 Hz.

This formula constitutes an approximate
 relation which is applicable to liquids whose
 viscosity corresponds approximately to that of
 water. For liquids with a higher viscosity,

values of f may be chosen which lie up to 10% lower, and vice versa for liquids with a lower viscosity than that of water, where frequencies have to be applied which may lie up to 10% above the approximate value. The vibrations may be sinusoidal, but especially favourable results are achieved according to the invention, if a saw-toothed amplitude is chosen for the above mentioned vibrations, i.e. an amplitude which rises more steeply than it falls.

The invention also includes a suitable device for carrying out this method, comprising a housing for the liquid to be prilled having a base comprising a fixed perforated plate through which the liquid can pass, and a vibration generator including a vibration plate reciprocable normal to itself located parallel to and spaced from the perforated plate, the housing having the form of a spiral and being provided with a tangential liquid inlet, and liquid current guiding means being arranged within the housing and extending radially in relation to the centre of the perforated plate.

Further advantageous embodiments of the device according to the invention consist in that the vibration generator is connected with the vibration plate by a mechanically rigid connection such as a shaft, and the upper part of the housing is suitably sealed from the vibration plate or the shaft with an elastic seal. The perforated plate and the vibration plate are suitably circularly shaped and have substantially equal diameters. Advantageously the current-guiding means, comprise laminas, and between the inlet of the liquid into the housing and the perforated plate, one or more filters or sieves are installed; preferably such a filter is a cylindrical sieve surrounding the liquid current-guiding means. According to a preferred embodiment the vibration plate is arranged between the perforated plate and the housing cover and is also provided with perforations, which preferably have a larger diameter than that of the perforations of the perforated plate.

The invention will now be illustrated in more detail by way of example with reference to the accompanying drawings, in which:

Fig. 1 is a side view;

Fig. 2 is a horizontal section along line II—II of Fig. 1;

Figs. 3 and 4 show similar views of a modified embodiment;

Fig. 5 illustrates the pressure wave which results in the embodiment according to Figs. 1 and 2, and

Fig. 6 shows a similar illustration of the pressure wave for the embodiment according to Figs. 3 and 4.

The device comprises a spiral shaped housing 1 having a tangential inlet 2, and a cylindrical filter or sieve 3 located centrally between the central interior of the housing and the spiral-shaped outer wall. The bottom of the

housing is formed by a peripheral inlet base part 5 and a central perforated plate 4 rigidly fixed to the part 5 so that it does not vibrate. The perforated plate is provided with a plurality of perforations 6, through which a liquid that is to be prilled emerges in a manner that will be described hereinafter. At a peripheral inlet top part 7, a vibration plate 8 is connected to an elastic annular seal 9, so that the vibration plate lies at a distance from the perforated plate and parallel in relation thereto. The vibration plate 8 is rigidly connected to a vibration generator 11 via a shaft 10. Between the sieve 3 and the perforated plate 4, the base part 5 possesses radially arranged laminas 12, which serve for guiding the liquid and for avoiding transverse currents. When the vibration plate 8 is caused to vibrate, a pressure wave emanates periodically from the plate, and this wave is reflected at the perforated plate 6, runs back to the vibration plate 8 and is again reflected therefrom, the vibration strength diminishing rapidly with each reflection. The pressure waves that are produced and reflected become superimposed and as a result a pressure wave is formed acting upon the perforated plate, which pressure wave is slightly out-of-phase in relation to the vibration waves of the vibration plate. The degree of phase displacement depends upon the distance of the perforated plate from the vibration plate and upon the sound velocity in the liquid. It amounts for example to 30 angular degrees. When applying the relation referred to previously between frequency, exit velocity and perforation diameter, the liquid jets emerging from the perforations show a very uniform rotationally symmetrical wave formation. The constriction points constitute the predetermined disintegration lengths. The deformation of the jets is so strong that the preformed drops, lined up one next to the other in a similar manner to a string of pearls, with only very narrow connections in between, emerge from the perforations of the perforated plate and separate very rapidly without fine grains being formed.

Fig. 5 illustrates schematically by means of arrows the propagation of the pressure wave D when operating the above described device.

The embodiment according to Figs. 3 and 4, in which similar parts bear similar reference numerals, varies from the first embodiment in that the vibration plate 8 is arranged close to the perforated plate 4, i.e. in the interior of the housing, and in that the shaft 10 forming the connection to the vibrator 11 passes through the annular elastic seal 9 covering the upper part of the housing, which seals off the top part 7. Another difference consists in that the vibration plate 8 is itself provided with perforations 13. In this embodiment, transverse currents at the perforated plate are avoided and the result is an improved pressure wave propagation as well as a

reduced phase displacement between vibration plate and perforated plate. The pressure wave has the form illustrated in Fig. 6.

The method of the invention and the device described above are used with advantage in the production of artificial fertiliser. The following examples illustrate the prilling of ammonium nitrate and urea.

Example 1:

Ammonium nitrate having a melting point of 183°C is melted and is inserted into the device at a pre-pressure of 3 m liquid column. The average exit velocity is 4.3 m/sec and the diameter of the perforations in the perforated plate is 1.25 mm. The vibration frequency to be applied is

$$f = \frac{4.3 \times 1000}{1.25 \times \pi} = 1,100 \text{ Hz.}$$

It has shown that in this way optimum prilling results can be achieved, i.e. one obtains very uniform grains with an average diameter of 2.1 mm without practically any fine grains.

Example 2:

Urea with a melting point of 145°C is melted and passed through the device at a pre-pressure of 2 m liquid column; the resulting average exit velocity is 3.5 m/sec; the perforation diameter is 1 mm; the frequency from the above relation

$$f = \frac{3.5 \times 1000}{1.0 \times \pi} = 1,120 \text{ Hz.}$$

Also in this case extremely uniform grains with an average diameter of 1.7 mm were obtained and no dust content could be observed.

WHAT WE CLAIM IS:—

1. A method of prilling a liquid, in particular a melt, in which the liquid is passed under pressure through a perforated plate, wherein the liquid is subjected to periodical pressure fluctuations in the direction of its flow through the perforated plate before it passes through the plate, and the frequency of these pressure fluctuations, in dependence upon the exit velocity v in m/sec and upon the perforation diameter d in mm substantially follows the relation

$$f = \frac{v \cdot 1000}{\pi \cdot d}$$

and is in the range of 100 to 2000 Hz.

2. A method as claimed in Claim 1, wherein the periodical pressure fluctuations are saw-toothed or sinusoidal vibrations.

3. A device for carrying out the method as claimed in Claim 1 or Claim 2, comprising a housing for the liquid to be prilled having a base comprising a fixed perforated plate through which the liquid can pass, and a vibration generator including a vibration plate reciprocable normal to itself located parallel to and spaced from the perforated plate, the housing having the form of a spiral and being provided with a tangential liquid inlet, and liquid current guiding means being arranged within the housing and extending radially in relation to the centre of the perforated plate.

4. A device as claimed in Claim 3, wherein one or more filters are located between the liquid inlet and the perforated plate.

5. A device as claimed in Claim 4, wherein said one or more filters comprise a cylindrical sieve surrounding the liquid current guiding means.

6. A device as claimed in any of Claims 3 to 5, wherein the vibration plate is connected to the vibration generator by means of a mechanically rigid connection in the form of a shaft.

7. A device as claimed in Claim 6, wherein the vibration plate forms part of an upper wall of the housing and is sealed against the upper part of the housing by elastic sealing means.

8. A device as claimed in Claim 6, wherein the vibration plate is located between the perforated plate and the upper wall of the housing and the shaft passes through an opening in the upper wall of the housing.

9. A device as claimed in Claim 8, wherein the shaft is sealed against the upper part of the housing by elastic sealing means.

10. A device as claimed in Claim 8 or Claim 9, wherein the vibration plate is provided with perforations which preferably have a larger diameter than the perforations in the perforated plate.

11. A device as claimed in any of Claims 3 to 10, wherein the perforated plate and the vibration plate are circular and have substantially equal diameters.

12. A device for carrying out the method as claimed in Claim 1 or Claim 2, substantially as hereinbefore described with reference to Figs. 1, 2 and 5 or Figs. 3, 4 and 6 of the accompanying drawings.

PAGE WHITE & FARRER,
Chartered Patent Agents,
27, Chancery Lane,
London, WC2A 1NT,
Agents for the Applicants.

1454597
2 SHEETS

COMPLETE SPECIFICATION
*This drawing is a reproduction of
the Original on a reduced scale*
Sheet 1


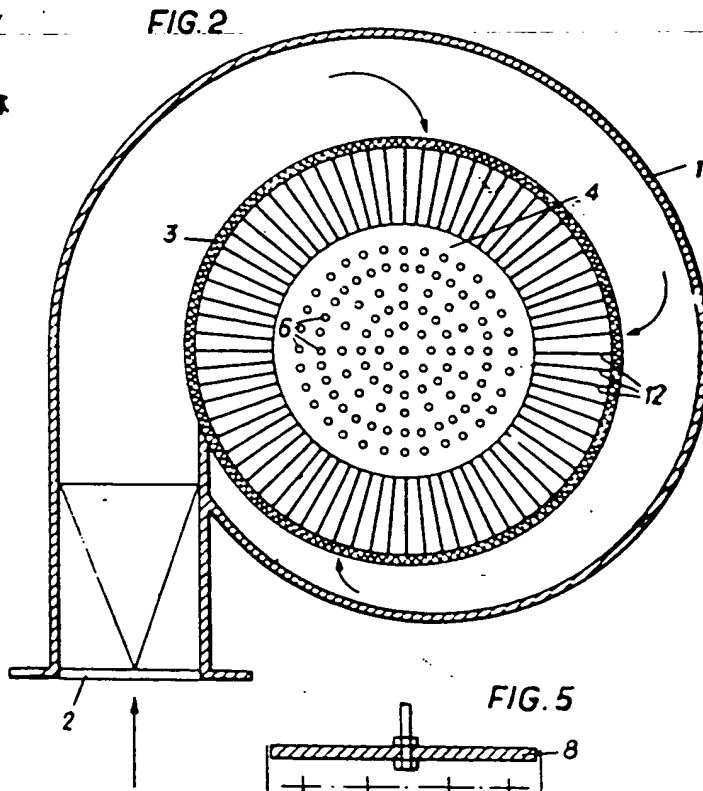
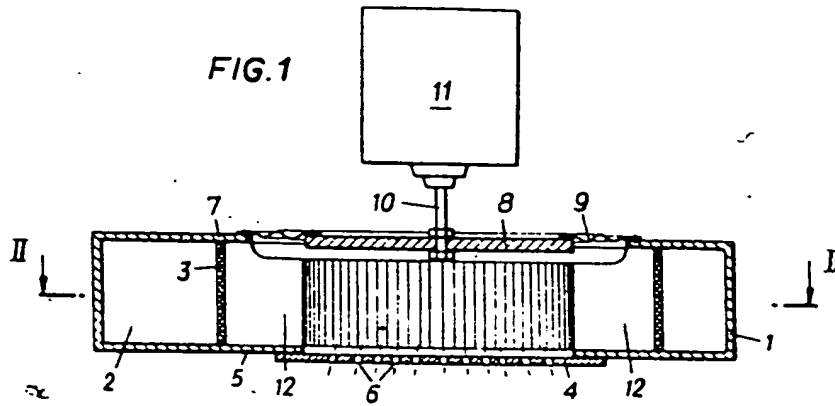


FIG.3

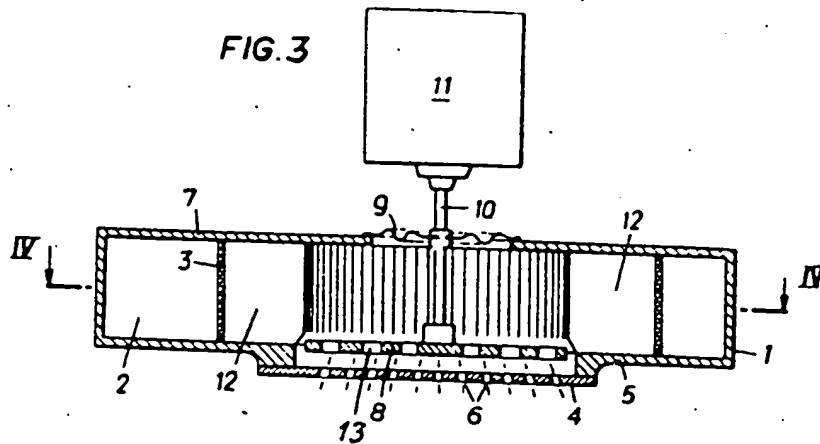


FIG. 4


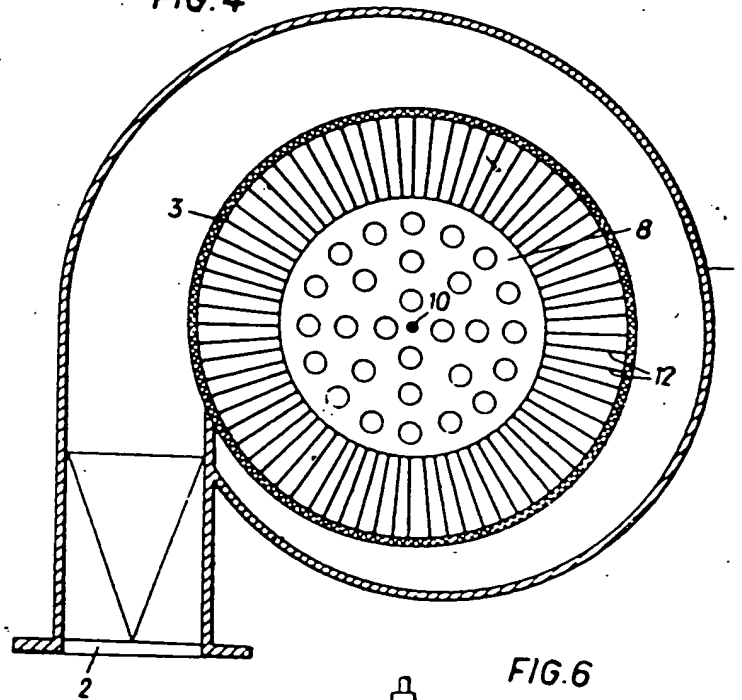


FIG. 6



THIS PAGE BLANK (USPTO)